



THROUGHBOLT ANCHOR - ETA option 7

Reference: TB-7




Material :

White zinc plated

Advantages :

- Fast and easy installation through the fixture
- Pre-assembled nut and washer
- Gives support to close edge spacing, minimum thickness
- Reduced Anchor length
- Cost effective solution for flexible use in non cracked concrete

Dessin technique

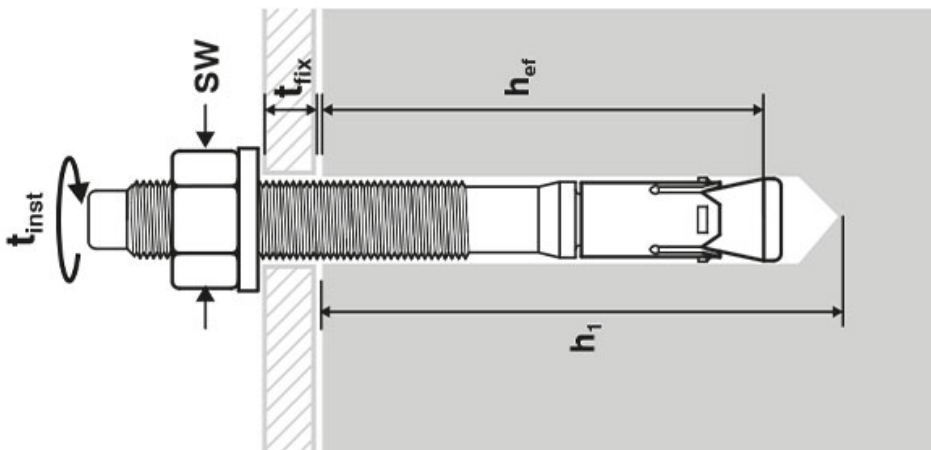

* Not available in France

Description longue (Informations techniques)

Tableau des caracteristiques

Diamètre	Longueur	h1	tfix	SW	tinst	Hef	Référence
M8	50	60	3	13	15	42	TB7-08050
M8	65	60	5	13	15	42	TB7-08065
M8	80	60	20	13	15	42	TB7-08080
M8	100	60	13	40	15	42	TB7-08100
M8	120	60	60	13	15	42	TB7-08120
M10	75	70	5	17	30	48	TB7-10075
M10	95	70	25	17	30	48	TB7-10095
M10	120	70	50	17	30	48	TB7-10120
M10	130	70	60	17	30	48	TB7-10130
M12	100	80	15	19	40	57	TB7-12100
M12	120	80	19	35	40	57	TB7-12120
M12	135	80	50	19	40	57	TB7-12135
M12	180	80	95	19	40	57	TB7-12180
M16	125	105	15	24	120	74	TB7-16125
M16	140	105	30	24	120	74	TB7-16140
M6	40	55	3	10	8	38	TB7-06040*
M6	45	55	10	5	8	38	TB7-06045*
M6	55	55	15	10	8	38	TB7-06055*
M6	70	55	30	10	8	38	TB7-06070*
M6	85	55	45	10	8	38	TB7-06085*
M6	95	55	55	10	8	38	TB7-06095*
M8	105	60	45	13	15	42	TB7-08105*
M10	65	70	3	17	30	48	TB7-10065*
M10	90	70	20	17	30	48	TB7-10090*
M10	115	70	45	17	30	48	TB7-10115*
M12	80	80	5	19	40	57	TB7-12080*
M12	140	80	55	19	40	57	TB7-12140*
M12	150	80	65	19	40	57	TB7-12150*
M16	90	105	3	24	120	74	TB7-16090*
M16	105	105	24	5	120	74	TB7-16105*
M16	150	105	40	24	120	74	TB7-16150*
M16	180	105	70	24	120	74	TB7-16180*
M16	220	105	110	24	120	74	TB7-16220*
M20	125	130	5	30	140	90	TB7-20125*
M20	160	130	40	30	140	90	TB7-20160*
M20	200	130	30	80	140	90	TB7-20200*
M20	220	130	100	30	140	90	TB7-20220*
M20	300	130	180	30	140	90	TB7-20300*
M24	180	155	40	36	160	105	TB7-24180*
M24	260	155	120	36	160	105	TB7-24260*