




for fixing flexible insulation under cladding

Reference: FI08

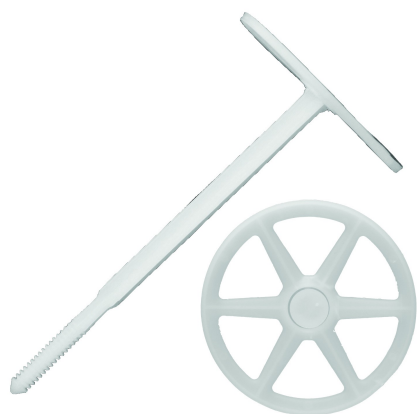

For fixing flexible insulation which is protected by cladding.

Dessin technique

Description longue (Informations techniques)

Base material: A - Concrete

Base material: E - Aerated concrete

Base material: B - SOLID MASONARY

Material: Nylon

Type: Insulation Anchor

Insulation type: Flexible

Insulation plug: Hammer fixing

Insulation thickness min: 35

Insulation thickness max.: 210

WASHER DIAMETER: 90mm

Tableau des caracteristiques

Longueur	ØDrill	h1	tfix	WASHER	C	Hef	Référence
80	8	35	55	90		25	FI08080
100	8	35	75	90		25	FI08100
120	8	35	95	90		25	FI08120
140	8	35	115	90		25	FI08140

160	8	35	135	90	25	FI08160
180	8	40	150	90	30	FI08180*
200	8	40	170	90	30	FI08200*
220	8	40	190	90	30	FI08220*
240	8	40	210	90	30	FI08240*