




THROUGHBOLT WHITE ZINC PLATED STEEL

Reference: TB7



Dessin technique

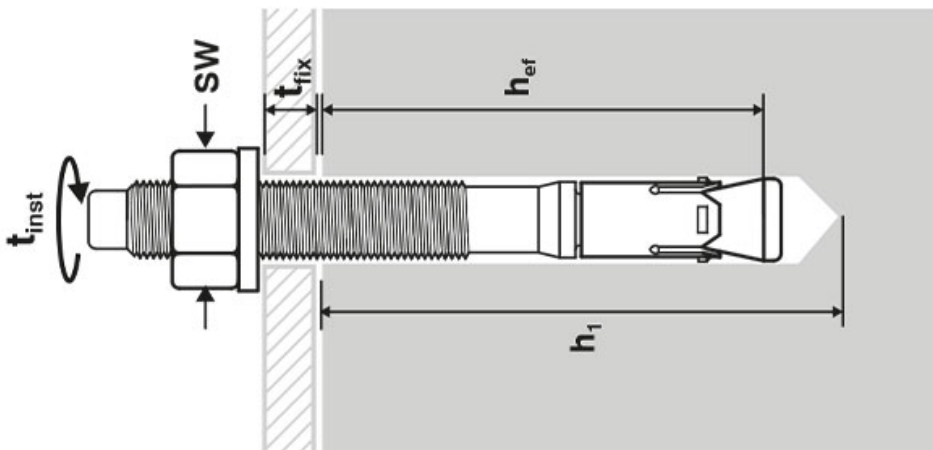

Description longue (Informations techniques)

Tableau des caracteristiques

Diamètre	Longueur	ØDrill	h1	SW	tfix	tinst	Hef	df	hnom	ETA	Référence
M6	40	6	55	10	3	8	38	7	45		TB7-06040
M6	45	6	55	10	5	8	38	45	7		TB7-06045
M6	55	6	55	10	15	8	38	45	7		TB7-06055
M6	70	6	55	10	30	8	38	45	7		TB7-06070
M6	85	6	55	10	45	8	38	7	45		TB7-06085
M6	95	6	55	10	55	8	38	45	7		TB7-06095
M8	50	8	60	13	3	15	42	50	9		TB7-08050
M8	65	8	60	13	5	15	42	50	9	X	TB7-08065
M8	80	8	60	13	20	15	42	50	9	X	TB7-08080
M8	100	8	60	13	40	15	42	50	9	X	TB7-08100
M8	105	8	60	13	45	15	42	50	9	X	TB7-08105
M8	120	8	60	60	13	15	42	50	9	X	TB7-08120
M10	65	10	70	17	3	30	48	57	12		TB7-10065
M10	75	10	70	17	5	30	48	57	12	X	TB7-10075
M10	90	10	70	17	20	30	48	57	12	X	TB7-10090
M10	95	10	70	17	25	30	48	12	57	X	TB7-10095
M10	115	10	70	17	45	30	48	57	12	X	TB7-10115
M10	120	10	70	17	50	30	48	57	12	X	TB7-10120
M10	130	10	70	17	60	30	48	57	12	X	TB7-10130
M12	80	12	80	19	5	40	57	68	14		TB7-12080
M12	100	12	80	19	15	40	57	68	14	X	TB7-12100
M12	120	12	80	19	35	40	57	68	14	X	TB7-12120
M12	135	12	80	19	50	40	57	68	14	X	TB7-12135
M12	140	12	80	19	55	40	57	68	14	X	TB7-12140
M12	150	12	80	19	65	40	57	68	14	X	TB7-12150
M12	180	12	80	19	95	40	57	68	14	X	TB7-12180
M16	90	16	105	24	3	120	74	90	18		TB7-16090
M16	105	16	105	24	5	120	74	90	18		TB7-16105
M16	125	16	105	24	15	120	74	90	18	X	TB7-16125
M16	140	16	105	24	30	120	74	90	18	X	TB7-16140
M16	150	16	105	24	40	120	74	90	18	X	TB7-16150
M16	180	16	105	24	70	120	74	90	18	X	TB7-16180
M16	220	16	105	24	110	120	74	90	18	X	TB7-16220
M20	125	20	130	30	5	140	90	110	23		TB7-20125
M20	160	20	130	30	40	140	90	110	23		TB7-20160
M20	200	20	130	30	80	140	90	110	23		TB7-20200
M20	220	20	130	30	100	140	90	110	23		TB7-20220
M20	300	20	130	30	180	140	90	110	23		TB7-20300
M24	180	24	155	36	40	160	105	130	28		TB7-24180
M24	260	24	155	36	120	160	105	130	28		TB7-24260