




# Throughbolt anchor - stainless steel - ETA Option 1

Reference: A4-BZ2

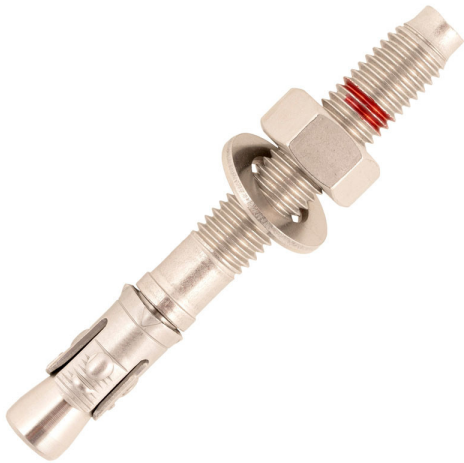

## **Efficient**

High-resistance steel for high performance.

## **Polyvalent**

Can be used outside, as well as inside.

## **Dessin technique**

### **Description longue (Informations techniques)**

Family: Heavy duty anchors

Use: Indoor/Outdoor

Use: Fixation dans le béton

Assessment: ETA opt. 7

Assessment: ETA

Assessment: Fire120

Base material: Concrete

Material: Stainless steel

Type: Throughbolt

Loads: Heavy

Loads: Medium

Screw head: Threaded

Socket:

## Tableau des caracteristiques

Diamètre	Longueur	tfix	ØDrill	h1	SW	tinst	Lf	Référence
M8	65	5	8	60	13	20	35	A4-BZ2-08X06 5
M8	75	15	8	60	13	20	45	A4-BZ2-08X07 5
M8	100	40	8	60	13	20	65	A4-BZ2-08X10 0
M8	120	60	8	60	13	20	90	A4-BZ2-08X12 0
M10	90	10	10	75	17	45	65	A4-BZ2-10X09 0
M10	100	20	10	75	17	45	65	A4-BZ2-10X10 0
M10	120	40	10	75	17	45	85	A4-BZ2-10X12 0
M10	140	60	10	75	17	45	100	A4-BZ2-10X14 0
M12	100	5	12	85	19	60	56	A4-BZ2-12X10 0
M12	120	25	12	85	19	60	76	A4-BZ2-12X12 0
M12	140	45	12	85	19	60	96	A4-BZ2-12X14 0
M16	125	15	16	100	24	130	68	A4-BZ2-16X12 5
M16	145	35	16	100	24	130	94	A4-BZ2-16X14 5